

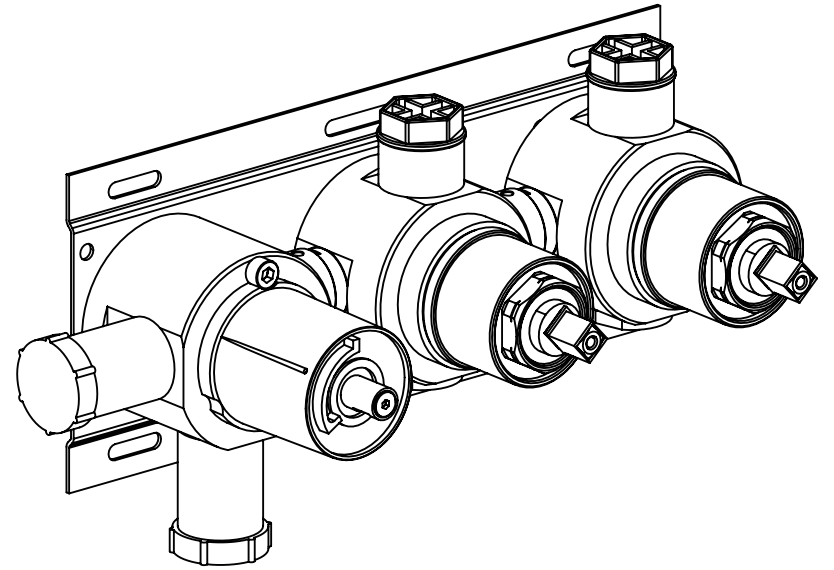


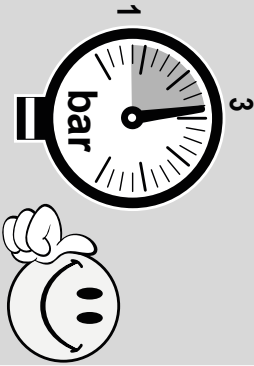




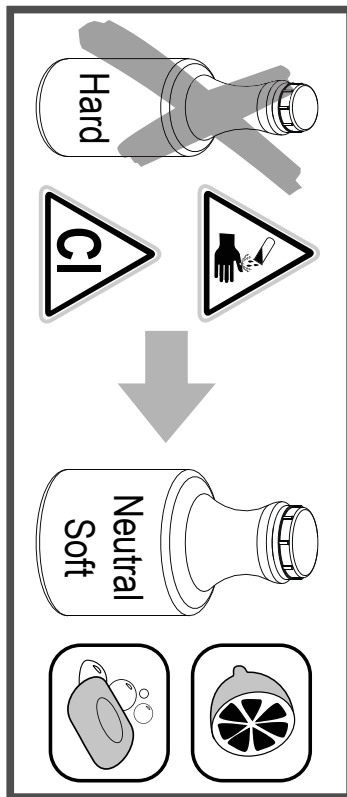
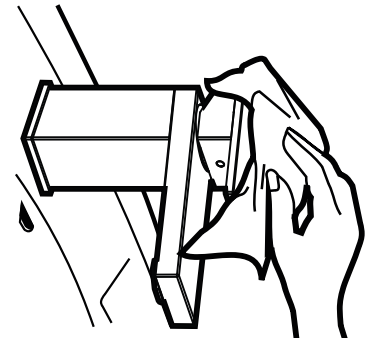
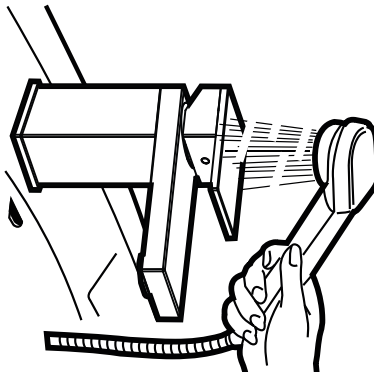



SUPER[®]
INOX





Made in Italy

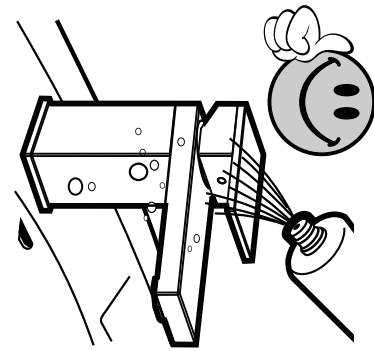


0274011X



1Pz

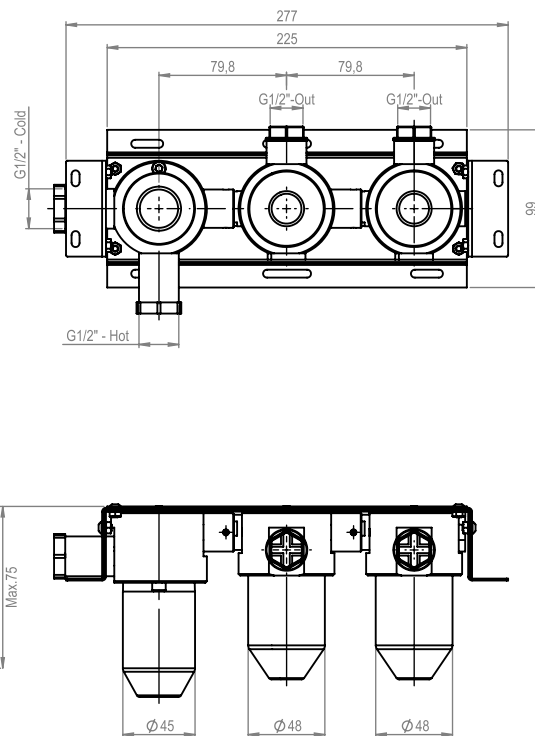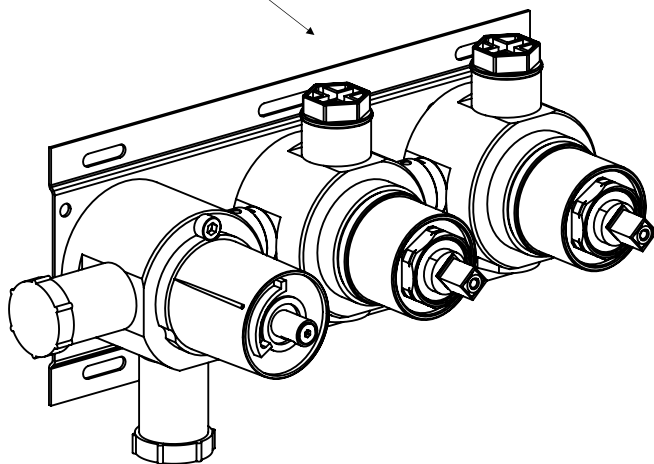


The producer set and guarantee the thermostatic valve at 38°C (see position on the drawing). Maximum temperature at 3bar 49°C.

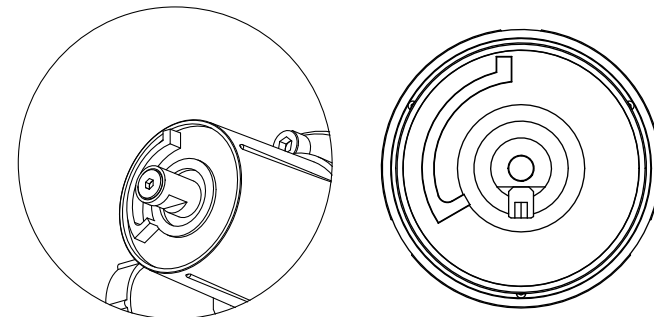


1

Min. 54
Max. 75

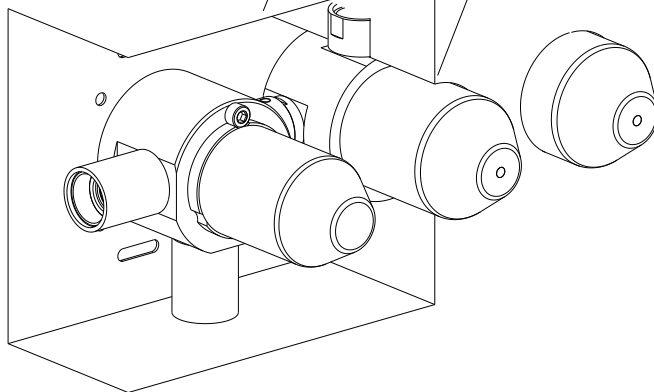

Depth Min.54 Max.75 finished surface

2

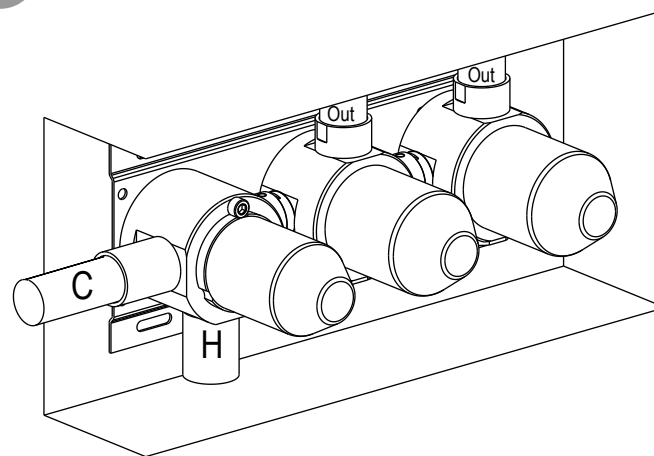

Connect and test the plant
(3bar)

3

